

PDF technical sheet 7906UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls


Product definition

d	1.1811 "
D	1.8504 "
B	0.3543 "
d1	1.4134 "
d2	1.3661 "
D1	1.6181 "
D2	1.7165 "
a	0.3819 "
Contact angle, α	15 °
rs min	0.0118 "
r1s min	0.0059 "
f0	15.9
Precision class	P42
Mass	0.18 oz
Brand	NTN

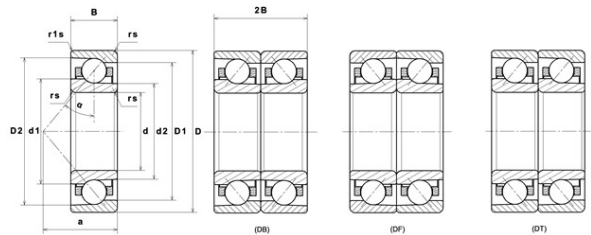

Product performance

Dynamic load, C	8.60 kN
Static load, C0	6.60 kN
Nlim (oil)	48,700 RPM
Nlim (grease)	30,400 RPM
Preload level	GN
Peload value	49 kN
axial rigidity	38.3 N/ μ m
radial rigidity	212.2 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.97 Hz
Characteristic outer ring frequency, BPF0	8.37 Hz
Characteristic inner ring frequency, BPF1	10.64 Hz

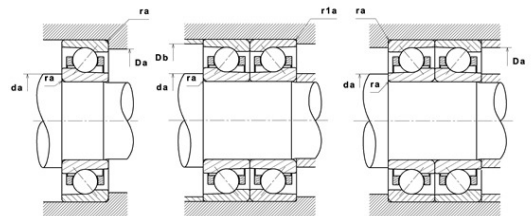

Abutment dimensions

da min	1.2795 "
Da max	1.7520 "
Db max	1.8031 "
r1a max	0.0059 "
ra max	0.0118 "
D6	1.4291 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series	e	Single or DT bearing arrangement				DB or DF arrangement					
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e			
		X	Y	X	Y	X	Y	X	Y		
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	0.72	1.65	2.39
		0.357	0.4				1.4			1.57	2.28
		0.714	0.43				1.3			1.46	2.11
		1.07	0.46				1.23			1.38	2
		1.43	0.47				1.19			1.34	1.93
		2.14	0.5				1.12			1.26	1.82
		3.57	0.55				1.02			1.14	1.66
		5.35	0.56							1.12	1.63
	7.14	0.56	1	1.12	1.63						
	25°	0.68		0.41	0.87		0.92	0.67	1.41		
30°	0.8		0.39	0.76		0.78	0.63	1.24			

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series	e	Single or DT bearing arrangement		DB or DF arrangement	
		Xo	Yo	Xo	Yo
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$