



PDF technical sheet #6004LLUC4/L740QP




Single row deep groove ball bearings

Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

Product definition	
d	0.7874 "
D	1.6535 "
B	0.4724 "
rs min	0.0236 "
Radial clearance class	C4
Mass	0.24 oz
Brand	NTN

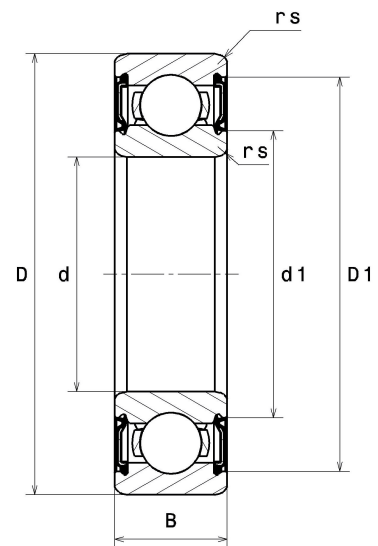

Product performance	
Dynamic load, C	9.40 kN
Static load, C0	5.05 kN
Fatigue limit load, Cu	0.23 kN
f0	13.9
Nlim (grease)	11,000 RPM
Min operating temperature, Tmin	-13 °C
Max operating temperature, Tmax	230 °C

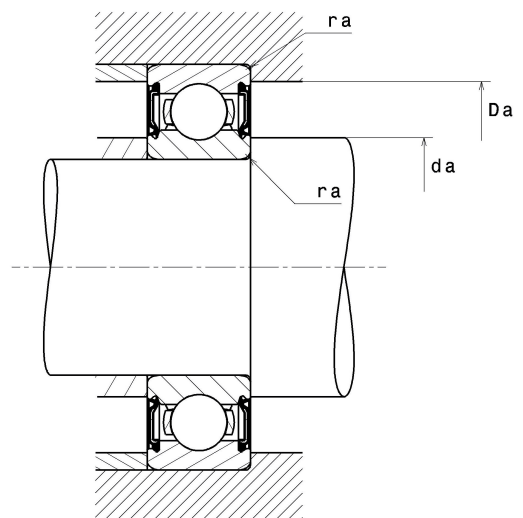

Abutment dimensions

da min	0.9449 "
da max	1.0236 "
Da max	1.4961 "
ra max	0.0236 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

$$P_0 = X_0 \cdot Fr + Y_0 \cdot Fa$$

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement:

If $P_0 < Fr$, then use $P_0 = Fr$