


PDF technical sheet 7022UCG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	4.3307 "
D	6.6929 "
B	1.1024 "
d1	5.1260 "
d2	4.9370 "
D1	5.9016 "
D2	6.2756 "
a	1.2953 "
Contact angle, α	15 °
rs min	0.0787 "
r1s min	0.0394 "
f0	15.7
Precision class	P42
Mass	6.98 oz
Brand	NTN

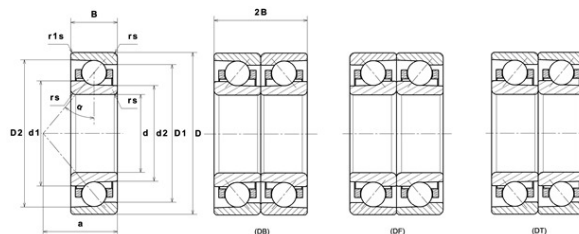

Product performance	
Dynamic load, C	104 kN
Static load, C0	106 kN
Nlim (oil)	13,400 RPM
Nlim (grease)	8,400 RPM
Preload level	GN
Peload value	630 kN
axial rigidity	140.4 N/ μ m
radial rigidity	810 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.55 Hz
Characteristic outer ring frequency, BPF0	9.18 Hz
Characteristic inner ring frequency, BPF1	11.82 Hz

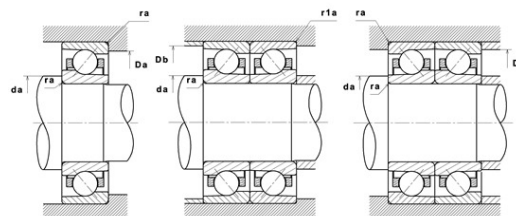

Abutment dimensions

da min	4.7244 "
Da max	6.2992 "
Db max	6.4764 "
r1a max	0.0394 "
ra max	0.0787 "
D6	5.1142 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Series	e	Single or DT bearing arrangement				DB or DF arrangement				
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e		
		X	Y	X	Y	X	Y	X	Y	
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	0.72	2.39
		0.357	0.4				1.4			2.28
		0.714	0.43				1.3			2.11
		1.07	0.46				1.23			2
		1.43	0.47				1.19			1.93
		2.14	0.5				1.12			1.82
		3.57	0.55				1.02			1.66
		5.35	0.56							1.63
	7.14	0.56	1	1.63						
	25°	0.68		0.41	0.87		0.92	0.67	1.41	
30°	0.8		0.39	0.76		0.78	0.63	1.24		

Equivalent static radial load

$$P_o = X_o.F_r + Y_o.F_a$$

Series	e	Single or DT bearing arrangement		DB or DF arrangement	
		X _o	Y _o	X _o	Y _o
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If $P_o < F_r$, then use $P_o = F_r$