

PDF technical sheet


7909UADG/GNP42U3G




High precision angular contact ball bearings

High precision angular contact ball bearing, moulded polyamide cage centred on balls

Product definition	
d	1.7717 "
D	2.6772 "
B	0.4724 "
d1	2.0748 "
d2	2.0000 "
D1	2.3780 "
D2	2.5197 "
a	0.7559 "
Contact angle, α	25 °
rs min	0.0236 "
r1s min	0.0118 "
f0	16.1
Precision class	P42
Mass	0.42 oz
Brand	NTN

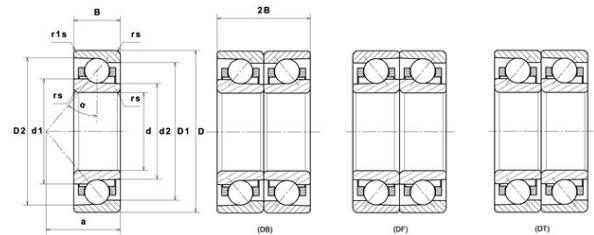

Product performance	
Dynamic load, C	17 kN
Static load, C0	14.10 kN
Nlim (oil)	29,000 RPM
Nlim (grease)	18,000 RPM
Preload level	GN
Peload value	167 kN
axial rigidity	127.3 N/ μ m
radial rigidity	269.5 N/ μ m
Min operating temperature, Tmin	-4 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.81 Hz
Characteristic outer ring frequency, BPF0	8.41 Hz
Characteristic inner ring frequency, BPF1	10.59 Hz

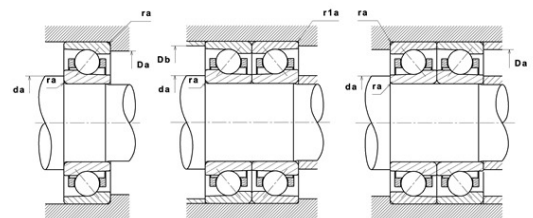

Abutment dimensions

da min	1.9488 "
Da max	2.5000 "
Db max	2.5787 "
r1a max	0.0118 "
ra max	0.0236 "
D6	2.0787 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Series	e	Single or DT bearing arrangement				DB or DF arrangement				
		Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e		
		X	Y	X	Y	X	Y	X	Y	
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	0.72	2.39
		0.357	0.4				1.4			2.28
		0.714	0.43				1.3			2.11
		1.07	0.46				1.23			2
		1.43	0.47				1.19			1.93
		2.14	0.5				1.12			1.82
		3.57	0.55				1.02			1.66
		5.35	0.56							1.63
	7.14	0.56	1	1.63						
	25°	0.68		0.41	0.87		0.92	0.67	1.41	
30°	0.8		0.39	0.76		0.78	0.63	1.24		

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Series	e	Single or DT bearing arrangement		DB or DF arrangement	
		X ₀	Y ₀	X ₀	Y ₀
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If $Po < Fr$, then use $Po = Fr$