



PDF technical sheet 71934HVURJ74

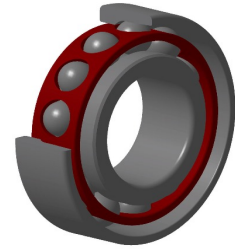


High precision angular contact ball bearings

High precision angular contact ball bearing, laminated resin cage centred on outer ring

Product definition	
d	6.6929 "
D	9.0551 "
B	1.1024 "
d1	7.4803 "
D1	8.2686 "
D2	8.5672 "
a	2.4016 "
Contact angle, α	25 °
rs min	0.0787 "
r1s min	0.0394 "
f0	16.994
Precision class	P4
Mass	10.26 oz
Brand	SNR

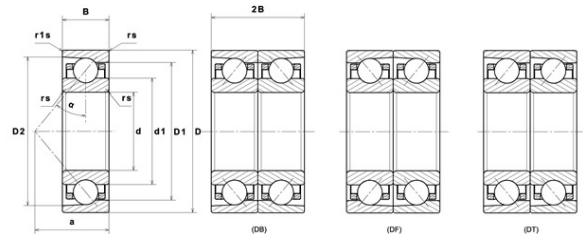

Product performance	
Dynamic load, C	101 kN
Static load, C0	137 kN
Fatigue limit load, Cu	5.40 kN
Nlim (oil)	8,000 RPM
Nlim (grease)	5,300 RPM
Axial displacement K Factor	0.32
Preload level	7
Peload value	1,550 kN
axial rigidity	513 N/ μ m
radial rigidity	1,079 N/ μ m
Min operating temperature, Tmin	-22 °C
Max operating temperature, Tmax	248 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.93 Hz
Characteristic outer ring frequency, BPF0	14.79 Hz
Characteristic inner ring frequency, BPF1	17.21 Hz

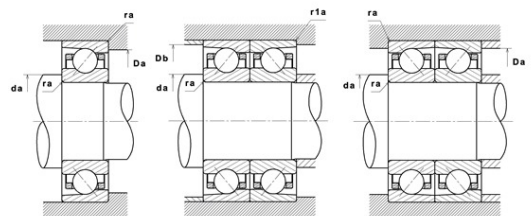

Abutment dimensions

da min	7.0866 "
db min	7.0866 "
Da max	8.6614 "
Db max	8.6614 "
r1a max	0.0394 "
ra max	0.0787 "
D6	7.6378 "

Calculation factors

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

Series	α	e	Single or DT bearing arrangement				DB or DF arrangement				
			Fa / Fr ≤ e		Fa / Fr > e		Fa / Fr ≤ e		Fa / Fr > e		
			X	Y	X	Y	X	Y	X	Y	
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.178	0.38	1	0	0.44	1.47	1	1.65	0.72	2.39
		0.357	0.4				1.4		1.57		2.28
		0.714	0.43				1.3		1.46		2.11
		1.07	0.46				1.23		1.38		2
		1.43	0.47				1.19		1.34		1.93
		2.14	0.5				1.12		1.26		1.82
		3.57	0.55				1.02		1.14		1.66
		5.35	0.56						1.12		1.63
	7.14	0.56	1	1.12	1.63						
	25°		0.68		0.41	0.87		0.92	0.67	1.41	
30°		0.8		0.39	0.76		0.78	0.63	1.24		

Equivalent static radial load

$$P_o = X_o.Fr + Y_o.Fa$$

Series	α	Single or DT bearing arrangement		DB or DF arrangement	
		X _o	Y _o	X _o	Y _o
70 (NTN & SNR) 72 (NTN & SNR) 78 (NTN) 79 (NTN) 719 (SNR)	15°	0.5	0.46	1	0.92
	25°		0.38		0.76
	30°		0.33		0.66

For single or DT bearing arrangement :

If $P_o < Fr$, then use $P_o = Fr$