


PDF technical sheet 22320EMW33




Double row spherical roller bearings

Spherical roller bearing, one-piece machined cage, groove and lubrication holes on outer ring

Product definition	
d	3.9370 "
D	8.4646 "
B	2.8740 "
d2	4.9882 "
D1	7.3504 "
rs min	0.1181 "
Number of lubrication holes	3
b	0.5236 "
k	0.2362 "
e	0.34
Y1	1.98
Y2	2.94
Y0	1.93
Radial clearance class	CN
Mass	45.07 oz
Brand	SNR

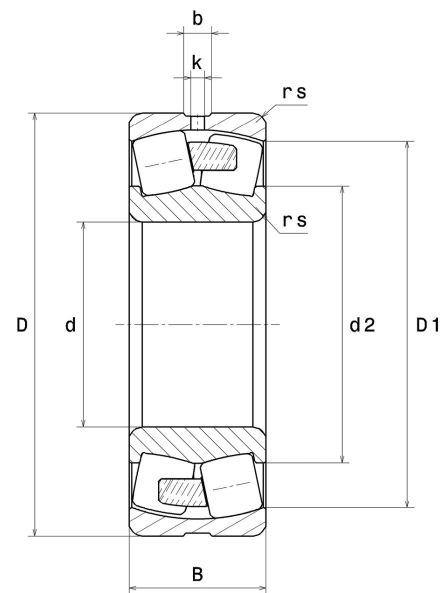

Product performance	
Dynamic load, C	827 kN
Static load, C0	844 kN
Fatigue limit load, Cu	72.40 kN
Nref	2,600 RPM
Nlim	3,100 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	4.96 Hz
Characteristic outer ring frequency, BPF0	6.08 Hz
Characteristic inner ring frequency, BPF1	8.92 Hz

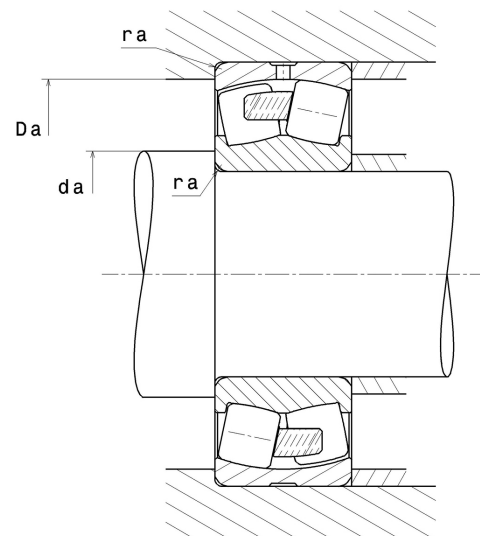

Abutment dimensions

da min	4.4882 "
Da max	7.9134 "
ra max	0.0984 "

Calculation factors

Equivalent dynamic radial load

$$P = X \cdot Fr + Y \cdot Fa$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$Po = Xo \cdot Fr + Yo \cdot Fa$$

Xo	Yo
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .