


PDF technical sheet 22344EMKW33




Double row spherical roller bearings

Spherical roller bearing, one-piece machined cage, groove and lubrication holes on outer ring, tapered bore 1:12

Product definition	
d	8.6614 "
D	18.1102 "
B	5.7087 "
d2	11.5866 "
D1	15.7402 "
rs min	0.1969 "
Number of lubrication holes	8
b	0.8819 "
k	0.4724 "
Associated sleeve reference	H2344H
e	0.31
Y1	2.15
Y2	3.2
Y0	2.1
Radial clearance class	CN
Mass	402.12 oz
Brand	SNR

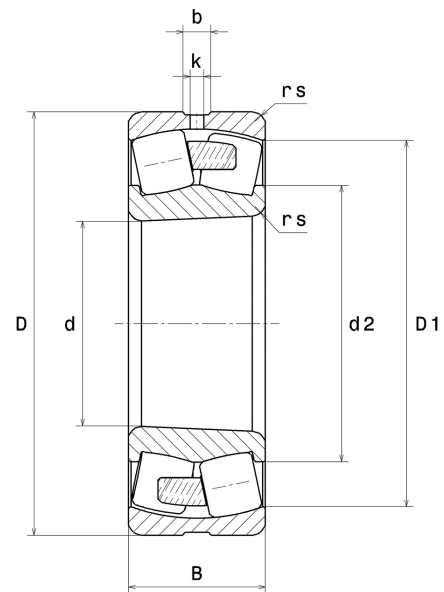

Product performance	
Dynamic load, C	3,270 kN
Static load, C0	3,680 kN
Fatigue limit load, Cu	265 kN
Nref	900 RPM
Nlim	1,400 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.40 Hz
Characteristic rolling element frequency, BSF	4.91 Hz
Characteristic outer ring frequency, BPF0	6.06 Hz
Characteristic inner ring frequency, BPF1	8.94 Hz

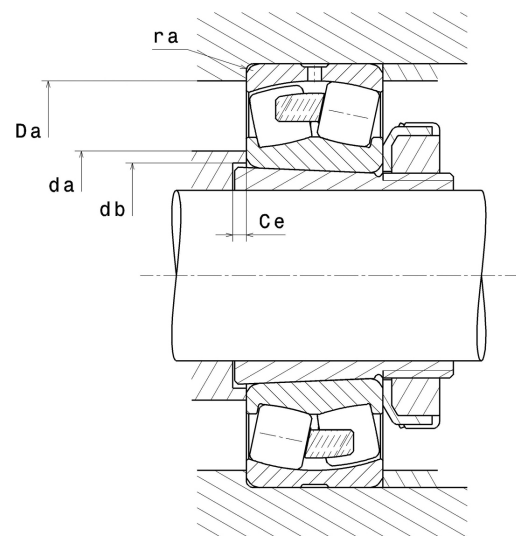

Abutment dimensions

da min	9.4488 "
db min	9.2913 "
Ce min	0.3543 "
Da max	17.3228 "
ra max	0.1575 "

Calculation factors

Equivalent dynamic radial load

$$P = X.Fr + Y.Fa$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$Po = Xo.Fr + Yo.Fa$$

Xo	Yo
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .