


PDF technical sheet 23256VMKW33




Double row spherical roller bearings

Spherical roller bearing on two rows of rollers, with central rib on inner ring, one-piece machined cage centred on inner ring, groove and lubrication holes on outer ring, taper bore 1:12

Product definition	
d	11.0236 "
D	19.6850 "
B	6.9291 "
D1	16.7126 "
rs min	0.1969 "
Number of lubrication holes	3
b	0.8780 "
k	0.4724 "
Associated sleeve reference	H2356H
e	0.32
Y1	2.12
Y2	3.15
Y0	2.07
Radial clearance class	CN
Mass	536.16 oz
Brand	SNR

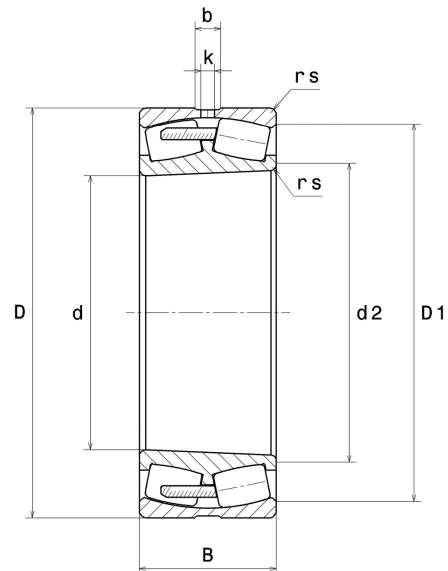

Product performance	
Dynamic load, C	2,940 kN
Static load, C0	5,000 kN
Fatigue limit load, Cu	300 kN
Nref	700 RPM
Nlim	1,100 RPM
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	392 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.91 Hz
Characteristic outer ring frequency, BPF0	8.18 Hz
Characteristic inner ring frequency, BPF1	10.82 Hz

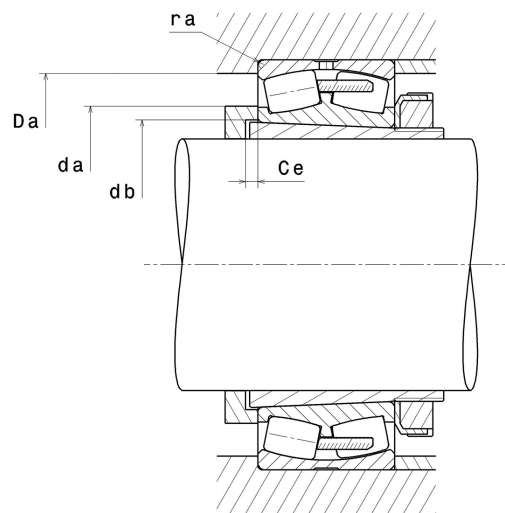

Abutment dimensions

da min	11.8110 "
Da max	18.8976 "
ra max	0.1575 "

Calculation factors

Equivalent dynamic radial load

$$P = X.F_r + Y.F_a$$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$$P_0 = X_0.F_r + Y_0.F_a$$

X ₀	Y ₀
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .